



P O L I J E T D F

PROVISIONAL
BROCHURE

BANCO ASPIRANTE CON FILTRI A CARTUCCIA

Table aspirante par filtration a cartouche

Downdraft table with cartridge filters

Absaugtisch mit filterpatronen

Mesa de aspiracion con filtros a cartuchos



•PARETI LATERALI
FISSE
PAROIS LATERALES FIXES
FIXED SIDES
FESTE SEITEWÄNDE
TABIQUES LATERALES FIJOS

OPTIONAL



•DIFFUSORE
DIFFUSEUR
AIR DIFFUSER
LUFTVERTEILER
DIFUSOR DE AIRE

OPTIONAL


•AFON
SILENCIEUX
SILENCER
SCHALLDÄMPFER
SILENCIADOR

OPTIONAL



•VERNICIATURA TOTALE
PEINTURE TOTALE
TOTAL PAINTING
KOMPLETLACKIERUNG
BARNIZADURA TOTAL



OPTIONAL



Polijet
DF
Made in Italy

DOWNDRAFT TABLE WITH CARTRIDGE FILTERS

www.coral.eu

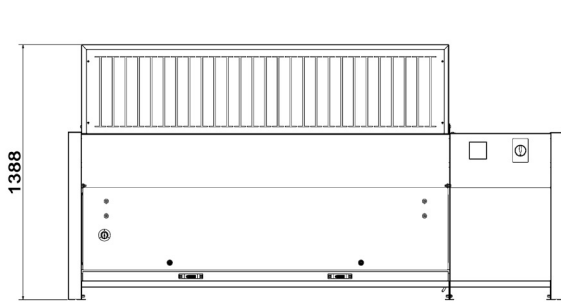


DIMENSIONI - DIMENSIONS - DIMENSIONS
ABMESSUNGEN - DIMENSIONES (mm)

	A	B	ØC
POLIJET DF 1500	1500	2195	420
POLIJET DF 2000	2000	2695	450
POLIJET DF 2500	2500	3195	450

STANDARD

Piano aspirante in acciaio zincato
Plan aspirant en tole galva
Suction top in galvanised sheet metal
Saugende Arbeitsfläche aus verzinktem Blech
Base de aspiración en acero galvanizado

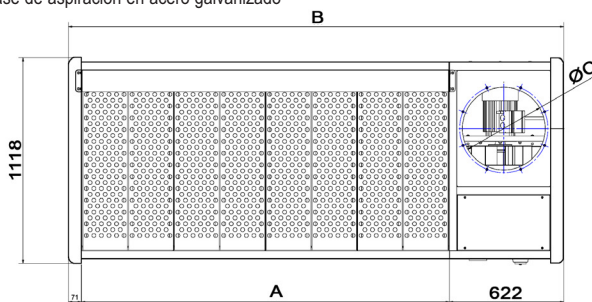

OPTIONAL

Parete aspirante con luce
Paroi aspirante avec lumiere
Suction wall with light
Saugwand und Beleuchtung
Pared aspirante con luz



OPTIONAL

ESTINTORE da definire in base all'applicazione
EXTINCTEUR être définie par l'application
FIRE EXTINGUISHER to be sized on application
FEUERLOSCHER je nach anwendung
EXTINTORE en función de la aplicación



POLIJET DF	1500	2000	2500
Portata massima - Debit max Max delivery - Luftmenge max Caudal máximo	m ³ /h 4000 - c.f.m 2352	m ³ /h 5000 - c.f.m 2942	m ³ /h 6860 - c.f.m 4037
Potenza - Puissance Power - Leistung Potencia	kW 2,2	kW 3	kW 4
Tensione - Potencia Voltage - Spannung Conexiones eléctricas	230/400 V 3ph 50 Hz	230/400 V 3ph 50 Hz	230/400 V 3ph 50 Hz
Giri / min - Tours /mn R.P.M. - Drehzahl Giri / min	2800	2800	2800
N° Cartucce - N° Cartouches N° Cartridges - N° Patronen N° Cartuchos	3	5	6
Superficie filtrante - Surface filtrante Filtering surface - Filterfläche Superficie filtrante	m ² 28	m ² 46,5	m ² 56
Certificazione IFA/BGIA - Certification IFA/BGIA IFA/BGIA rating - Zertifizierung IFA/BGIA Certificación IFA/BGIA	M-PES-TF * Ø 325 H 650 mm	M-PES-TF * Ø 325 H 650 mm	M-PES-TF * Ø 325 H 650 mm
Sistema di pulizia - Systeme de nettoyage Cleaning system - Reinigungssystem Sistema de limpieza	Pneumatico con comando automatico -Pneumatique avec contrôle automatique Pneumatic with automatic control - Pneumatisch mit automatische Steuerung Pneumatico con mando automático		
Dimensioni filtro - Dimensions du filtre Filter unit dimensions - Filterabmessungen Medidas del filtro	2195x1118x1388 (mm)	2695x1118x1388 (mm)	3195x1118x1388 (mm)

* **OPTIONAL**
M-PES/ALU

*Tutti i dati contenuti in questo catalogo sono suscettibili di variazioni e miglioramenti. La CORAL si riserva il diritto di modifiche senza preavviso.
*Les données sus-indiquées peuvent être modifiées et améliorées. CORAL a le droit d'effectuer ces changements sans obligation de préavis.
*Values on this catalogue are indicative and can be subject to modification and improvements. CORAL reserves the right to change them without previous advice.
*Änderungen vorbehalten.
* Todos los datos contenidos en este catálogo pueden sufrir variaciones y mejoras. CORAL se reserva el derecho de aportar modificaciones sin aviso previo.