



DTEN GO with DTEN Mate


for Existing Displays

SIMPLE | POWERFUL | PORTABLE

Transform any TV or Display into a Complete System for Video Meetings and Collaboration

Change your TV or display into a video conferencing solution with touch, optimized for Zoom.

Simply connect the DTEN GO via HDMI to any size display or TV. The DTEN Mate will pair with the DTEN GO for convenient touchscreen control and screen mirroring.

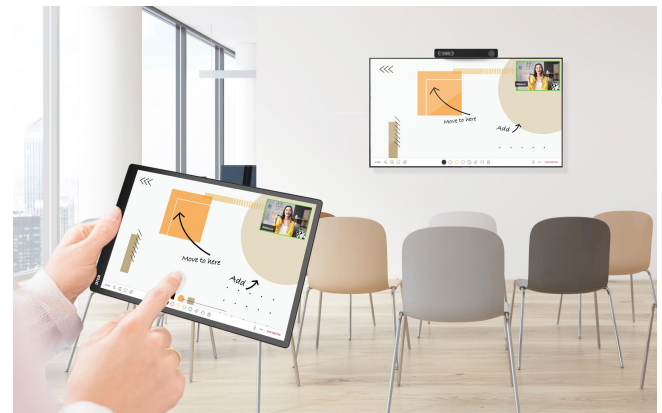

DTEN GO

Crystal Clear Conversations with Life-like Video and Touch Collaboration

The DTEN GO offers an advanced microphone array and smart camera system in a sleek and compact form factor for professional video meetings wherever you have an existing TV or display.

The companion DTEN Mate 10" portable touchscreen tablet provides intuitive whiteboarding and annotation tools with screen mirroring for easy control.

Be heard clearly with DTEN
Audio AI sound suppression
technology

Make a great impression with
DTEN smart camera
technology

Instantly transform any existing
display or TV for professional
video meetings

DTEN GO with DTEN Mate

for Existing Displays

SIMPLE | POWERFUL | PORTABLE

Leverage Existing AV Equipment and Meeting Spaces

No need to replace existing equipment to access professional grade video conferencing and collaboration technologies.

Simply attach DTEN GO to a wall mounted display or a TV on an AV cart for an instant complete collaboration solution.



One-touch to Start Zoom Meetings with Worry-free IT Support

DTEN GO with Mate includes Zoom meeting software for instant Zoom meetings, right out of the box.

Worry-free IT support is provided by cloud-based user and device management platform, DTEN Orbit.

Create an Instant Zoom Rooms Kiosk Anywhere in the Office

Deploy a virtual helpdesk or deliver digital signage virtually anywhere in the building with an existing TV or display.

Flash secondary emergency alerts, deploy temporary informational counters and display employee safety information with Zoom Rooms' kiosk mode.



DTEN Smart Connect

With DTEN Smart Connect, use DTEN GO's smart camera and microphone arrays with virtually any meeting platform. When attached to an external PC or laptop, simply select the DTEN GO's as the chosen input source.

DTEN GO with DTEN Mate



DTEN GO

Software	DTEN OS
Display	Utilizes connected display
Placement	Mount above or below TV or display
Camera System	4 Camera array: up to 32ft (10m) coverage Horizontal field of view (HFOV): 160° combined
Audio System	12 Microphone array: up to 32ft (10m) coverage HDMI & 3.5mm Audio Output Acoustic Echo Cancellation Automatic Gain Control (AGC) AI-based Noise Cancellation DTEN Smart Connect
Network	Ethernet (RJ-45) WiFi 2.4Ghz & 5Ghz IPv4 Dynamic Host Configuration Protocol (DHCP)/ Static HTTP/HTTPS Proxy Support
Inputs & Outputs	Ethernet LAN (RJ45) x 1 3.5mm Audio Jack x 1 HDMI Out x 2 USB Type-C x 1
In the Box	Power cord and adapter HDMI cable x 2 Ethernet cable x 1
Power	100 to 240 VAC, 50 to 60 Hz
Product Dimensions	10.7 x 2.1 x 2.75 in (272 x 54 x 69mm)
Product Weight	1.3 lb (0.6kg)
Packaging Dimensions	12.7 x 10.7 x 2.25 in (320 x 272 x 57mm)
Packaging Weight	3.55lb (1.61kg)
Operating Temperature and Humidity	Operating Temperature 0°C to 40°C Storage Temperature -10°C to 60°C Operating Humidity 20% to 80% RH Storage Humidity 10% to 60% RH



DTEN Mate

Software	DTEN Mate OS
Display	LED 10.1" Capacitive Multi-touch Display
Placement	On table or handheld
Network	WiFi 2.4Ghz & 5Ghz
Inputs & Outputs	USB Type-C x 1
In the Box	Power cord and adapter
Power	100 to 240 VAC, 50 to 60 Hz
Product Dimensions	9.38 x 5.8 x 1.0 in (240 x 148 x 25 mm)
Product Weight	1 lb (0.45kg)
Packaging Dimensions	12.6 x 6.8 x 1.5 in (320 x 173 x 38mm)
Package Weight	Approximately <2lb 1kg (Official weight TBD)

