

**DISTRIBUTION COUPLING (HP pressure test 150 b)**


**USE:**

- Distribution couplings for VRF variable refrigerant flow air-conditioning systems
- Saves time with multi-diameter inlets and outlets, to be cut to the required diameter.
- No pinching at bracing, one-piece body (leak-free)
- Minimum head loss.
- Minimum brazes.

**SPECIFICATIONS:**

- One multi-diameter inlet, two multi-diameter outlets
- Refrigeration-grade copper
- Reduced number of brazes.
- A single MS coupling allows 12 to 36 possible types of connections.
- Black insulation: Bls3d0 (M1) 13 or 19mm 116°C
- Can be supplied uncoated or insulated, individually or in pairs, manufacturer equivalences on request

**TECHNICAL DATA:**

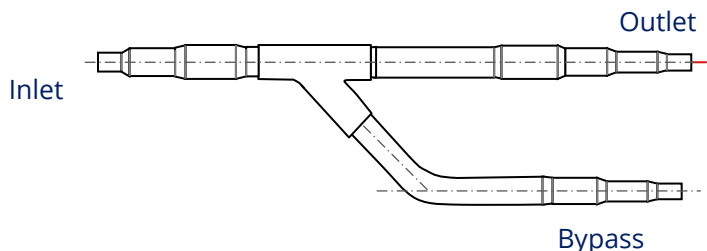

	Inlet Female diam			Outlet Female diam				Bypass Female diam		
MS023	1/2	3/8	-	1/2	3/8	1/4	-	3/8	1/4	-
MS124	5/8	1/2	3/8	5/8	1/2	3/8	1/4	1/2	3/8	1/4
MS224	3/4	5/8	1/2	3/4	5/8	1/2	3/8	5/8	1/2	3/8
MS324	7/8	3/4	5/8	7/8	3/4	5/8	1/2	3/4	5/8	1/2
MS423	1" 1/8	7/8	3/4	7/8	3/4	5/8	-	7/8	3/4	5/8
MS523	1" 3/8	1" 1/8	7/8	1" 1/8	7/8	3/4	-	1" 1/8	7/8	3/4
MS623	1" 5/8	1" 3/8	1" 1/8	1" 3/8	1" 1/8	7/8	-	1" 3/8	1" 1/8	7/8